
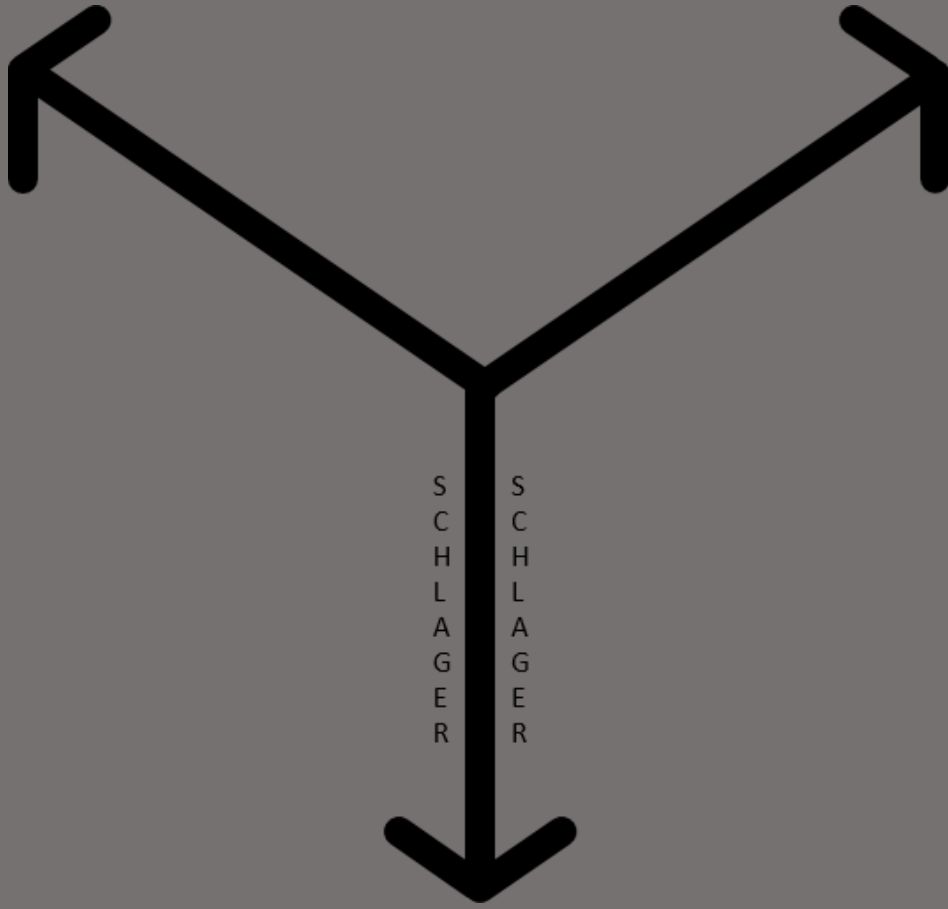



CUBED



CUBED  
BY SCHLAGER


SPECIFICATION BOOKLET

BORONIA GARDENS



## TABLE OF CONTENTS

COLOURBOND COLOURS.....	2
DOOR RANGE.....	2
APPLIANCES.....	3
PLUMBING FIXTURES .....	5
KITCHEN.....	5
LAUNDRY.....	6
BATHROOM & ENSUITE .....	7
EXHAUST FANS.....	9
ELECTRICAL.....	9
HOT WATER SYSTEM.....	10




## COLOURBOND COLOURS

### Contemporary colours



### Classic colours

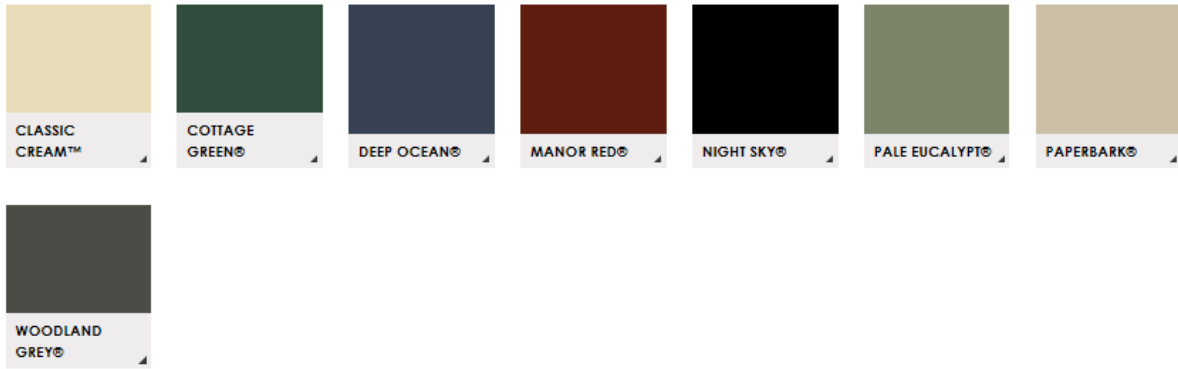

## DOOR RANGE



External Door


Internal Doors



Internal Door Handle

External Door Handle


Cavity Door Handle and Lock



## APPLIANCES



Model	WVE613S/W
type	single
available finishes	stainless steel/white
<b>main oven</b>	
oven functions	3 function
capacity	
- gross (litres)	80
- usable (litres)	72
oven cleaning	easy clean/removable door
catalytic liners*	available
timer	auto off timer
lights	1
glass layers in door	2
<b>general features</b>	
australian made	✓
retailer exclusive*	
controls	knob
number of shelves	2
oven/grill dish	✓
anti-spatter grill insert	
oven tray	✓
connection	hardwired
maximum current rating (amps)	9.6
telescopic runners*	available
<b>dimensions^</b>	
overall oven HxWxD (mm)	595 x 596 x 568
flush mount oven cut-out HxWxD (mm)	600 x 600 x 581
proud mount oven cut-out HxWxD (mm)	590 x 565 x 560



Model	WHG642SA
finish	stainless steel
connection	10A plug & lead
gas rating (NG)	40.6MJ/h
<b>burners</b>	
left front	14.4MJ/h
left rear	9.0MJ/h
right front	5.1MJ/h
right rear	12.1MJ/h
<b>features</b>	
trivets	enamel
ignition type	electronic
flame failure safety	
<b>dimensions^</b>	
WxDxH below bench (mm)	595 x 530 x 44
cut out WxD (mm)	560 x 490




Model	WRH605IS/W
type	Slide out
nominal width (mm)	600
finish	white/stainless steel
number of fans/speeds	1/3
max. airflow (m³/h)	210
noise level dB (high/low)	62/59
number of filters	1
recirculating option	
controls	auto-activated (pull/push)
top or rear duct	top
lights	1 x 28W halogen
<b>dimensions</b>	
W x D x H (mm)	599 x 300 x 175



OR

Model	WRJ600US/W
nominal width (mm)	600
finish	white/stainless steel
number of fans/speeds	1/3
max. airflow (m³/h)	200
noise level dB (high/low)	62/51
number of filters	2
recirculating option	✓
controls	push button
top or rear duct	both
lights	2 x 40W incandescent
<b>dimensions</b>	
W x D x H (mm)	598 x 500 x 160




## PLUMBING FIXTURES KITCHEN



Sink



Mixer



## LAUNDRY



Trough




Mixer



Washing Machine Taps



Floor Waste



## BATHROOM & ENSUITE



Toilet



Toilet Roll Holder



Basin



Basin Mixer





Mirror



Double Towel Rail



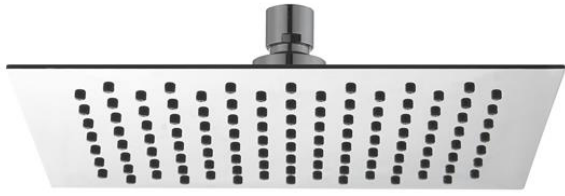

Shower Head



Shower Wall Arm



Shower Mixer



Soap Holder




Hand Towel Holder



Floor Waste



Shower Waste




## EXHAUST FAN WITH LIGHT



## ELECTRICAL

Light Switch and Power Point Covers





## HOT WATER SYSTEM



### OptiFlow Professional 20L

The OptiFlow Professional is an external continuous flow gas water heater with a 6 star energy rating and is available in 16L, 20L and 26L capacities. The product includes the Bosch patented OptiFlow combustion management and Easy Minimum technologies.

OptiFlow Professional 20L	-
<b>Technical Features</b>	
Bluetooth Enabled Appliance	Yes
Star Rating	6 Stars
Solar Compatible	Yes
Temperature Controllers	Up to 4 temperature Controllers
Maximum Temperature	Preset at 55°C. Adjustable to 60°C and 70°C
50°C Compliant Models Available	Yes
Weight (unpacked)	15 Kg
<b>Gas Supply Data</b>	
Maximum Nominal Gas Consumption	149 MJ/ h
Minimum Gas Supply Pressure - NG (in operation)	1.13 kPa
Minimum Gas Supply Pressure - LPG (in operation)	2.75 kPa
<b>Water Supply Data</b>	
Maximum Permissible Pressure (static)	1000 kPa
Minimum Operating Pressure	100 kPa
Minimum Operating Pressure for Max. Performance	300 kPa
Minimum Water Flow	2 L/ min
L/ min at 25°C Temperature Rise	20 L/ min
Maximum Inlet Temperature	80°C
<b>Electrical Circuit</b>	
Power Supply Voltage	230/ 240 Vac
Frequency	50 Hz
Power Consumption - Frost Protection	165 W
Power Consumption - Normal Operation	57 W
<b>Warranty Details (Domestic)</b>	
Parts and Labour	3 Years
Heat Exchanger (part only)	12 Years
<b>Pipe Connection Sizes</b>	
Gas Connection - NG or LPG	20 mm
Cold Water	20 mm
Hot Water	20 mm